KOHLER®

DEVONSHIRE_® **COMPLETE SOLUTION**™

Features

- Vitreous china
- Elongated bowl
- Combination toilet
- Class Five™ flushing system
- Includes seat and cover
- Includes wax ring and hardware installation kit
- 12" (30.5 cm) rough-in
- 2-1/8" (5.4 cm) glazed trapway
- 1.6 gpf (6 lpf) or 1.4 gpf (5.3 lpf)
- 11-3/4" (29.8 cm) x 9-1/4" (23.5 cm) water area
- 30" (76.2 cm) x 20-7/16" (51.9 cm) x 32-5/8" (82.9 cm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.2
- ASME A112.19.6
- Energy Policy Act of 1992
- IAPMO/UPC
- CSA B45
- ADA



ADA



Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- 0: White
- CP: Polished Chrome
- PB: Vibrant_® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description		Colors	Colors/Finishes	
K-11474	Two-piece elongated toilet		0 🗆	□ Other	
Recomm	ended Accessories				
K-4636	Cachet _™ Quiet-Close _™ Quiet-Release _™ elongated toilet seat with cover	0 🗆		□ Other	
K-4684	Glenbury™ elongated toilet seat with cover	0 🗆		Other	
K-7637	Angle supply with stop, annealed vertical tube and 3/8" NPT	CP		□ Other	
Optional	Accessories				
K-9439	Trip lever (non-CP)	🗆 PB		□ Other	
K-4650	Lustram elongated open-front toilet seat - for ADA compliance	0 🗆		□ Other	

Product Specification

The elongated bowl combination toilet shall be made of vitreous china. Toilet shall be $30^{\prime\prime}$ (76.2 cm) in depth, $20-7/16^{\prime\prime}$ (51.9 cm) in width, and $32-5/8^{\prime\prime}$ (82.9 cm) in height. Shall be ADA compliant when installed with a left hand trip lever, following the installation notes. Toilet shall be 1.6 gpf (6 lpf) or 1.4 gpf (5.3 lpf) with Class 5_{1M} flushing system. Toilet shall include seat with cover, wax ring, and hardware installation kit. Toilet shall have a $2-1/8^{\prime\prime}$ (5.4 cm) glazed trapway and $12^{\prime\prime}$ (30.5 cm) rough-in. Toilet shall have $11-3/4^{\prime\prime}$ (29.8 cm) x $9-1/4^{\prime\prime}$ (23.5 cm) water area. Toilet shall be Kohler Model K-11474-_____.

DEVONSHIRE® COMPLETE SOLUTION

Technical Information

Fixture:					
Configuration	Two-piece, elongated				
Water per flush	1.6 gal (6 L) or 1.4 gal (5.3 L)				
Passageway	2-1/8" (5.4 cm)				
Water area 11-3/4" (29.8 cm) x 9-1/4" (23.5 cm)					
Water depth from rim 6" (15.2 cm)					
Seat post hole centers	5-1/2" (14 cm)				
Included components:					
Elongated bowl		K-4288			
Toilet tank with left-hande	K-4708				
Tank cover	1044820				
Trip lever	85086				
Bolt cap accessory pack	1013092				
Tank attachment kit	1016548				
EB Toilet Seat	1086418				
Wax ring and hardware in	1023457				


Installation Notes

IMPORTANT! An open front seat must be installed for ADA compliance.

Install this product according to the installation guide.

Will comply with the American Disabilities Act (ADA) when installed per the requirements of the Accessibility Guidelines, Section 604 Water Closets, of the Act, which include the installation of an open front seat.

Section 604 states the required height of the toilet is 17'' (43.2 cm) to 19'' (48.3 cm) from the floor to the top of the seat to meet ADA requirements.

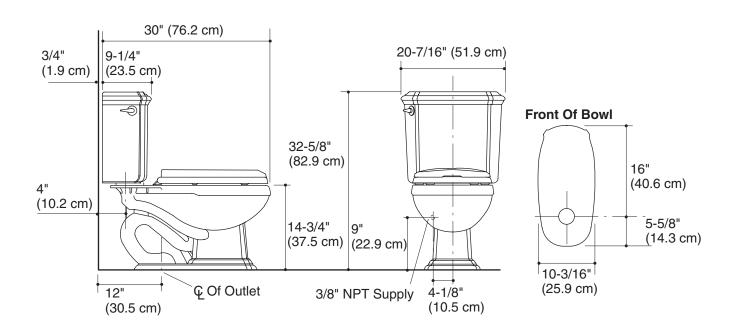

Product Diagram

