


ARCHER™ THE COMPLETE SOLUTION™

Features

- Vitreous china
- Elongated bowl
- Combination toilet
- Class Five® flushing system
- Includes seat and cover
- Includes wax ring and hardware installation kit
- 12" (30.5 cm) rough-in
- 2-1/8" (5.4 cm) glazed trapway
- 1.6 gpf (6 lpf) or 1.28 gpf (4.8 lpf)
- 12-1/4" (31.1 cm) x 9" (22.9 cm) water area
- 29" (73.7 cm) x 17-7/8" (45.4 cm) x 30" (76.2 cm)

COMFORT HEIGHT™ TOILET K-11477

ADA

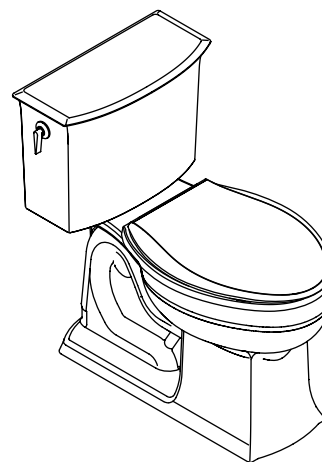

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.2/CSA B45.1
- ADA
- Energy Policy Act of 1992
- ICC/ANSI A117.1

Colors/Finishes

- 0: White

Accessories

- 0: White
- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Trip Lever	Colors/Finishes
K-11477	Comfort Height™ toilet with elongated bowl	left-hand	<input type="checkbox"/> 0

Recommended Accessories

K-4650	Lustra™ elongated open-front toilet seat – for ADA compliance	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-7637	Angle supply with stop – 3/8" NPT	<input type="checkbox"/> CP <input type="checkbox"/> PB	<input type="checkbox"/> Other_____

Optional Accessories

K-11069	Left-hand trip lever (non-CP)	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
---------	-------------------------------	-----------------------------	-------------------------------------

Product Specification

The elongated bowl combination toilet shall be made of vitreous china. Toilet shall be 30-1/2" (77.5 cm) in length, 17-1/4" (43.8 cm) in width, and 31" (78.7 cm) in height with a 12-1/4" (31.1 cm) x 9" (22.9 cm) water area. Toilet shall feature a flush rate of 1.6 gpf (6 lpf) or 1.28 gpf (4.85 lpf) with Class Five™ flushing system. Toilet shall include seat with cover, wax ring, and hardware installation kit. Toilet shall be 12" (30.5 cm) rough-in with a 2-1/8" (5.4 cm) glazed trapway. Toilet shall be Kohler Model K-11477-_____.

ARCHER™ THE COMPLETE SOLUTION™

Technical Information

Fixture:	
Configuration	Two-piece, elongated
Flush rate	1.6 gpf (6 lpf) or 1.28 gpf (4.85 lpf)
Passageway	2-1/8" (5.4 cm)
Water area	12-1/4" (31.1 cm) x 9" (22.9 cm)
Water depth from rim	6" (15.2 cm)
Seat post hole centers	5-1/2" (14 cm)


Included components:	
Bowl	K-4295
Tank	K-4493
Tank cover	1046462
Trip lever, left-hand	1067186
EB Toilet seat	K-4688
Tank accessory pack	1016548
Bolt cap accessory pack	1013092
Wax ring and Hardware installation kit	1023457

Installation Notes

Install this product according to the installation guide.

Will comply with the American Disabilities Act (ADA) when installed per the requirements of the Accessibility Guidelines, Section 604 Water Closets, of the Act. The Model Plumbing Codes require the installation of elongated open-front toilet seats in public bathrooms.

The Plumbing Codes require open-front elongated toilet seats on public use toilets.

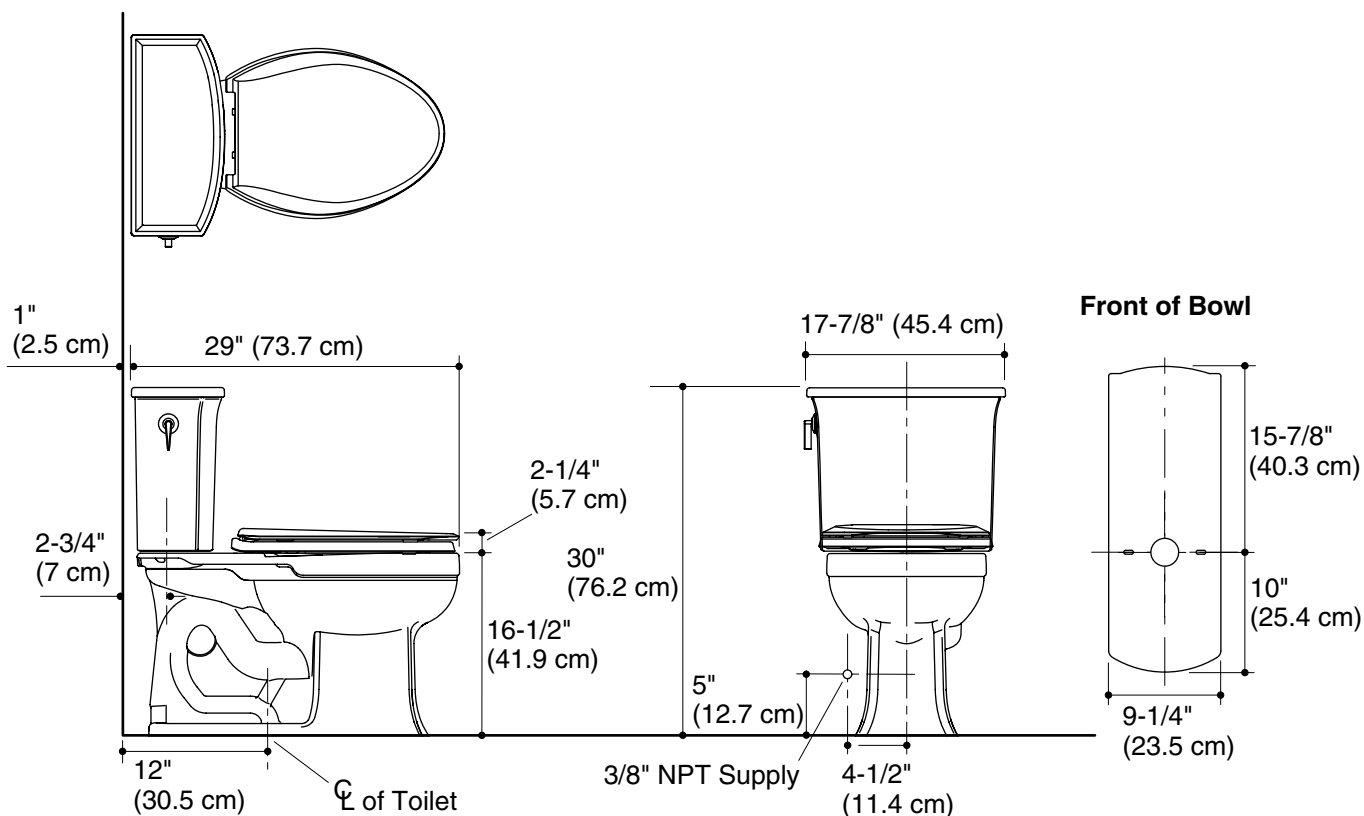

Product Diagram